


| PART NUMBER | DESCRIPTION | DIP TUBE LENGTH | NOTES |
|-------------|-------------|----------------------|--|
| 1001000125 | 125 VALVE | 7 13/16 IN.(19.84cm) | APPLICATOR TIP ATTACHED SPRAY TIP SEPARATE |
| 1001000126 | 126 VALVE | 4 1/4 IN. (10.80cm) | APPLICATOR TIP ATTACHED SPRAY TIP SEPARATE |
| 1001000128 | 128 VALVE | 6 7/8 IN. (17.46cm) | APPLICATOR TIP & SPRAY TIP SEPARATE |
| 1001000129 | 129 VALVE | 8 1/4 IN. (20.96cm) | APPLICATOR TIP ATTACHED SPRAY TIP SEPARATE |



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CLAYTON CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CLAYTON CORPORATION IS PROHIBITED.

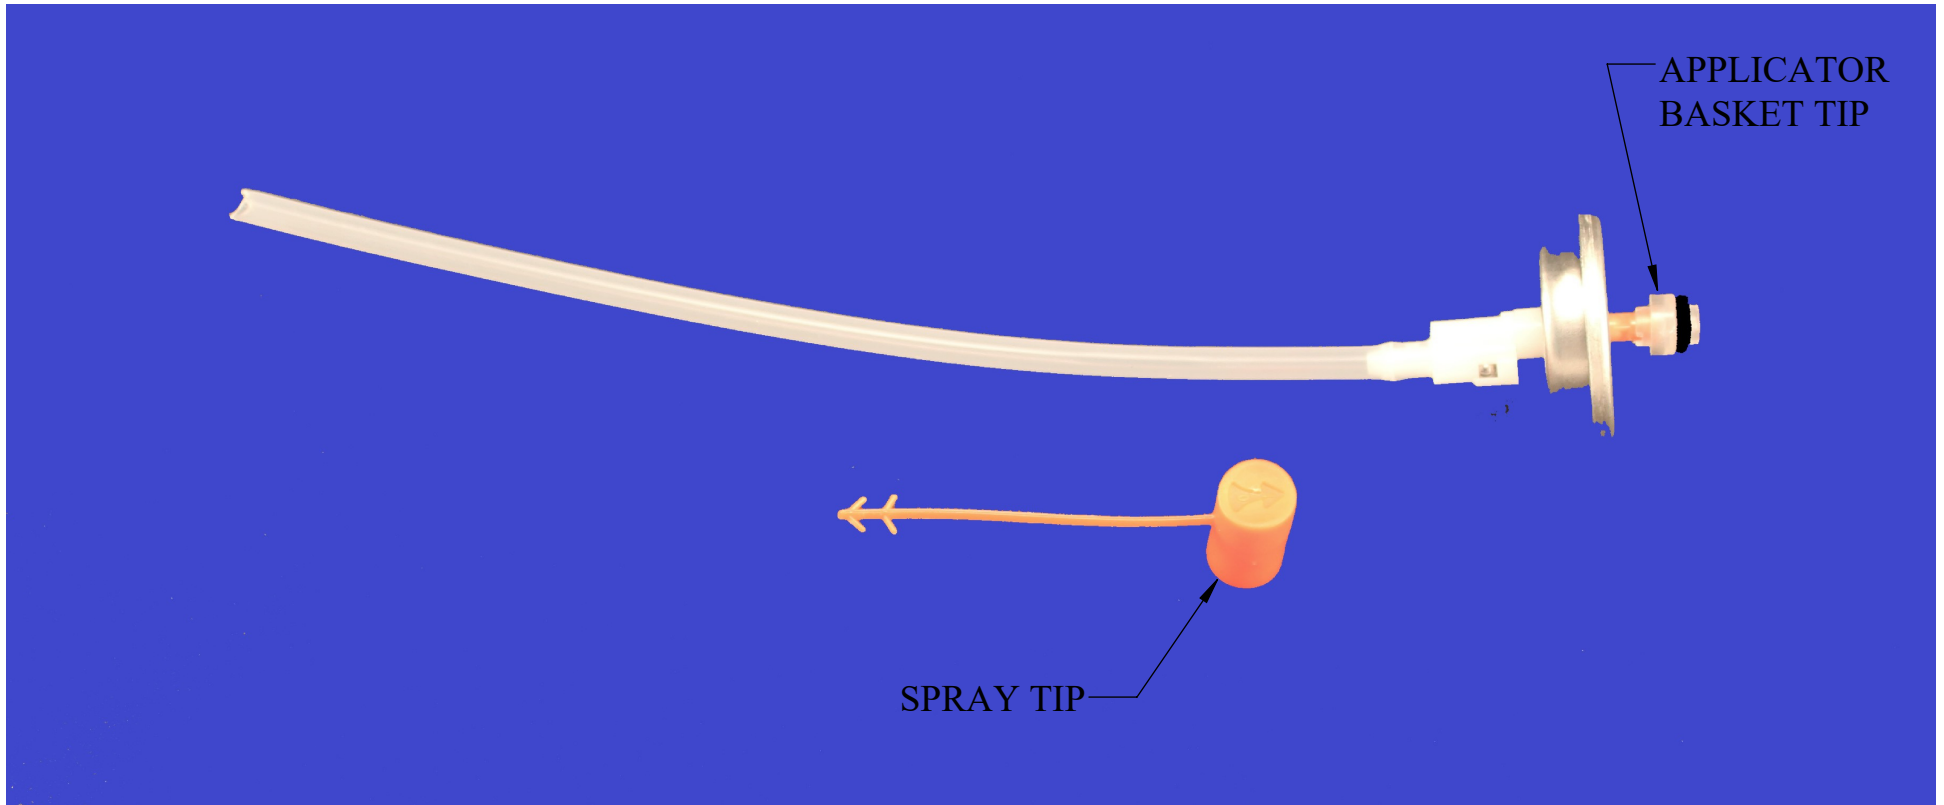

866 HORAN DR.,
 FENTON, MO 63026
 636-349-5333

| | | | | |
|--------------|--|---|--------------------------------|--------------|
| DRAWN BY: RB | | DATE: 06/15/2021 | TITLE: Cleaner Valve with Tips | |
| CHECKED BY: | | | SIZE: A | REV: 1 |
| Tolerances: | | DECIMAL INCHES: 0.0 +/- .015" 0.00 +/- .010" 0.000 +/- .005" ANGULAR: +/- .10 DEG. | PART #: 100100012X | SCALE: 2:1 |
| | | | MATERIAL: | SHEET 1 OF 2 |



866 Horan Drive
 Fenton, MO 63026 USA
 1-800-729-8220
 1-636-349-5333
 www.claytoncorp.com

SPECIFICATION SHEET

128 Valve with Dip Tube

Valve Part Number: 1009000128

Valve Information:

| Parameter | Information |
|------------|----------------------------------|
| Food Grade | No |
| Weight† | English: 0.27 oz.; Metric: 7.6 g |

Valve Component Information:

| Component | Appearance | Material | Other Information |
|-------------------------------|-----------------|-----------------|--|
| Mounting Cup | Silver | Tin Plate Steel | Top Coating: None Bottom Coating: None |
| Stem | White | Nylon | Orifices: English: 2 x 0.020 in. Metric: 2 x 0.51mm |
| Inner Seal | Black | Neoprene | |
| Inner Gasket | Black | Nitrile | |
| Spring | Silver | Stainless Steel | |
| Housing | White | POM | |
| Applicator Basket Tip Fitting | White | Polypropylene | |
| Applicator Basket Tip O-Ring | Black | EPDM | |
| Dip Tube | Natural - Clear | Polyethylene | Length: English: 6.875 in. Metric: 17.463cm |

Recommended Crimp Specification (Customer may need to adjust for their specific container):

| Measurement | English | Metric |
|-------------|-----------------------|-------------------|
| Diameter | 1.050 in. — 1.060 in. | 26.67mm — 26.92mm |
| Depth | 0.200 in. — 0.210 in. | 5.08mm — 5.33mm |

Gassing Information:

| Parameter | English | Metric |
|--|-----------------------|-----------------|
| Valve opening distance if gassing through valve: | 0.031 in. — 0.039 in. | 0.80mm — 1.00mm |

Carton Information:

| Item | English | Metric |
|----------|---|-----------------------------------|
| Quantity | 1,800 | 1,800 |
| Size | L: 22.0 in. x W: 14.6 in. x H: 15.7 in. | L: 56.0cm x W: 37.0cm x H: 40.0cm |
| Weight† | 33.2 lbs. | 15.0 kg |

Pallet Information:

| Item | USA | International |
|----------|---|-------------------------------------|
| Style | Square | Euro |
| Quantity | 54,000 | 36,000 |
| Size | L: 43.3 in. x W: 43.3 in. x H: 83.9 in. | L: 120.0cm x W: 80.0cm x H: 213.0cm |
| Weight† | 1,035 lbs. | 319 kg |

Valve Warehouse Storage Information:

| Condition | English | Metric |
|-------------|--------------------|--------------------|
| Location | Dry Protected Area | Dry Protected Area |
| Temperature | 40°F — 100°F | 4.4°C — 37.8°C |
| Time | Up to 5 years | Up to 5 years |

† Weights are approximates

Approved By: Brennan Fogarty

Date: 9/22/2021